



Total Food-Service Solutions

## Modular Cooking – Meritus 750

### Gas Hot Top

#### NGHT 12-75 MR



\*Due to routine technical improvement, the photograph shown may not represent the latest design of the products.

#### AVAILABLE MODEL

1. NGHT 12-75 MR

#### DESCRIPTION

Gas Hot Top with 27.5 kW power rate. Unit is equipped with static oven in below and removable round plate, which provide area for direct flame cooking. Working temperature oven maintained by thermostat with maximum working temperature of 310°C. Unit to be installed on open cabinet or similar elements, cantilever, or solid block solutions. Featuring removable clip joint to connect Meritus family product.

ITEM# : \_\_\_\_\_

MODEL# : \_\_\_\_\_

NAME : \_\_\_\_\_

SN : \_\_\_\_\_

#### MAIN FEATURE

- Hot Top made of thick 18 mm steel.
- Unit to be installed free standing, can be joined with base cabinet, table stand or cantilever system.
- Oven handle made from non heating material, to prevent burn injury during high temperature operation.
- Easy Oven Hinge, which is removable for easier cleaning and maintenance of Oven.
- Service maintenance can be done from the front panel.

#### CONSTRUCTION

- All exterior panels in 304 type of Stainless Steel
- Orbital top panel anti-scratch finishing.
- Top and side are mounted by 1.5mm of Stainless Steel.
- Adjustable ±25 mm Stainless Steel leg.
- Certified IPX4 protection.

#### INCLUDED ACCESSORIES

- Grill Oven.
- Extra Nozzle.
- Lifting for Hanging Hot Top Plate.


#### OPTIONAL ACCESSORIES

- Clip plate for joining

: \_\_\_\_\_

The company reserves the right to make modifications to the products without prior notice. All information correct at time of printing.  
2018.08.07



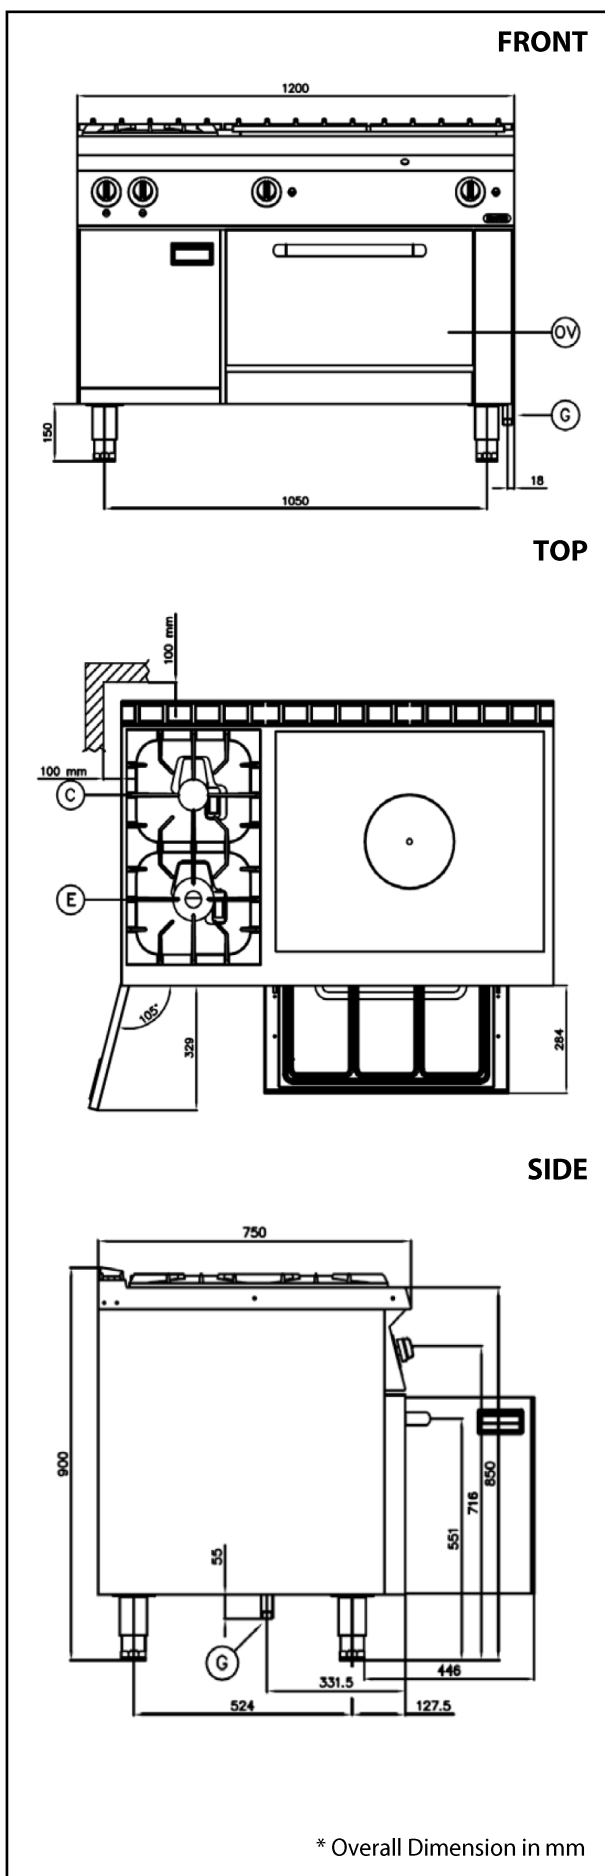

### GAS

Gas Power	:	27.5 kW (23,560 kCal/h)
Gas Type Option	:	G30/G31, G20
Gas Inlet	:	R ¾"
Natural Gas-Pressure	:	G20: 20 mbar
LPG Gas Pressure	:	28-30 mbar/ 37 mbar

### KEY INFORMATION

Hot Top Cooking Surface (WxD):	:	745x580 mm
Oven Cooking Surface (WxD) :	:	540x666 mm
Open Burner Cooking Surface :	:	2x(370x725) mm
Direct Heat Emission	:	5.75 kW
Direct Heat Emission (OB)	:	2.76 kW
Direct Heat Emission (Oven)	:	2.28 kW
Latent Heat Emission	:	2.30 kW
Latent Heat Emission (OB)	:	1.10 kW
Latent Heat Emission (Oven)	:	1.30 kW
Steam Emission	:	3.34 kg/h
Steam Emission (OB)	:	1.61 kg/h
Steam Emission (Oven)	:	1.91 kg/h
Min. Working Temperature	:	100° C
Max. Working Temperature	:	310° C
Shipping Height	:	1260 mm
Shipping Width	:	840 mm
Shipping Depth	:	930 mm
Shipping Volume	:	0.984 m <sup>3</sup>