

GAMME STANDARD

STANDARD RANGE


PEXMC-TR

2 vitesses
 Cuve inox
 Tête relevable
 Cuve amovible (sauf sur PE60MC-TR)
 Outil inox
 Grille de protection inox relevable
 Pieds réglables

Minuterie
 Tableau de commande électromécanique
 Transmission par chaines

OPTION

- Roulettes à frein (sauf sur PE60MC-TR)

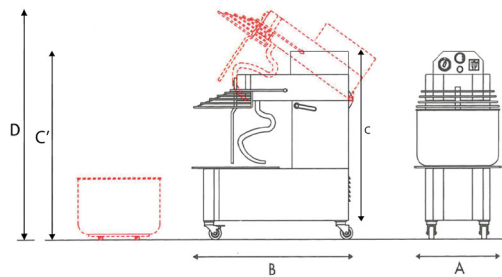
PEXMC-TR

2 speeds
 Stainless steel bowl
 Lifiable head
 Removable bowl (except for PE60MC-TR)
 Stainless steel raising safety grid
 Stainless steel tool
 Adjustable feet

Timer
 Electromechanical control panel
 Chain transmission

OPTION

- Castors with brake (except for PE60MC-TR)


PE18MC-TR
PE25MC-TR
PE38MC-TR
PE44MC-TR
PE60MC-TR
Dimensions / Dimensions

A mm	410	430	480	550	585
B mm	715	770	820	878	1050
C mm	820	900	900	900	1210
C' mm (avec roulettes / with castors)	875	850	760	955	-
D mm	1040	1150	1230	1240	1680

Poids / Weight

Kg	70	95	110	120	226
----	----	----	-----	-----	-----

Capacités / Capacities

Cuve / Bowl (L)	20	33	40	50	75
Farine / Flour (kg)	9*	15*	19*	24*	35
Pâte / Dough (kg)	15*	24*	31*	38*	56*

Nombre de vitesses / Number of speeds

	2	2	2	2	2
--	---	---	---	---	---

Puissance moteur / Motor power

1ère vitesse / 1st speed (Kw)	0.6	1	1.5	1.5	2.6
2ème vitesse / 2nd speed (Kw)	0.8	1.4	2.2	2.2	3.4

Voltage / Voltage

TRI - 400V - 50/60Hz