

SDE 40

SIMAG

38 kg Self-contained Ice Machine

Complete range: SDE 18 - SDE 24 - SDE 30 - SDE 34 - SDE 40 - SDE 50 - SDE 64 - SDE 84 - SDE 100 - SDE 170 - SDE 220

Technical features

- Stainless steel bodywork - scotch brite
- Air or water cooled
- Vertical pump
- Main switch (ON/OFF)
- Built-in cleaning system
- Easily accessible components
- Low power and water consumption
- Optimum ratio between ice production and bin capacity
- Reduced dimensions
- Double defrosting system



Internal bin capacity




12 kg of ice

570 cubes

Type of ice

Hollow Cubes

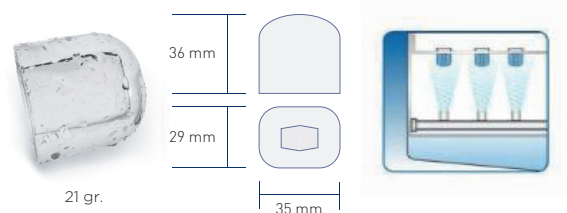

Machine dimensions

Net size WxDxH	377 x 555 x 726 mm
Net weight	40 kg
Shipping size WxDxH	450 x 620 x 740 mm
Shipping weight	47 kg

Voltage

230/50/1 Standard version

220-240/60/1 Available on demand

Technology and Certifications




SDE 40

SIMAG

38 kg Self-contained Ice Machine

Complete range: SDE 18 - SDE 24 - SDE 30 - SDE 34 - SDE 40 - SDE 50 - SDE 64 - SDE 84 - SDE 100 - SDE 170 - SDE 220

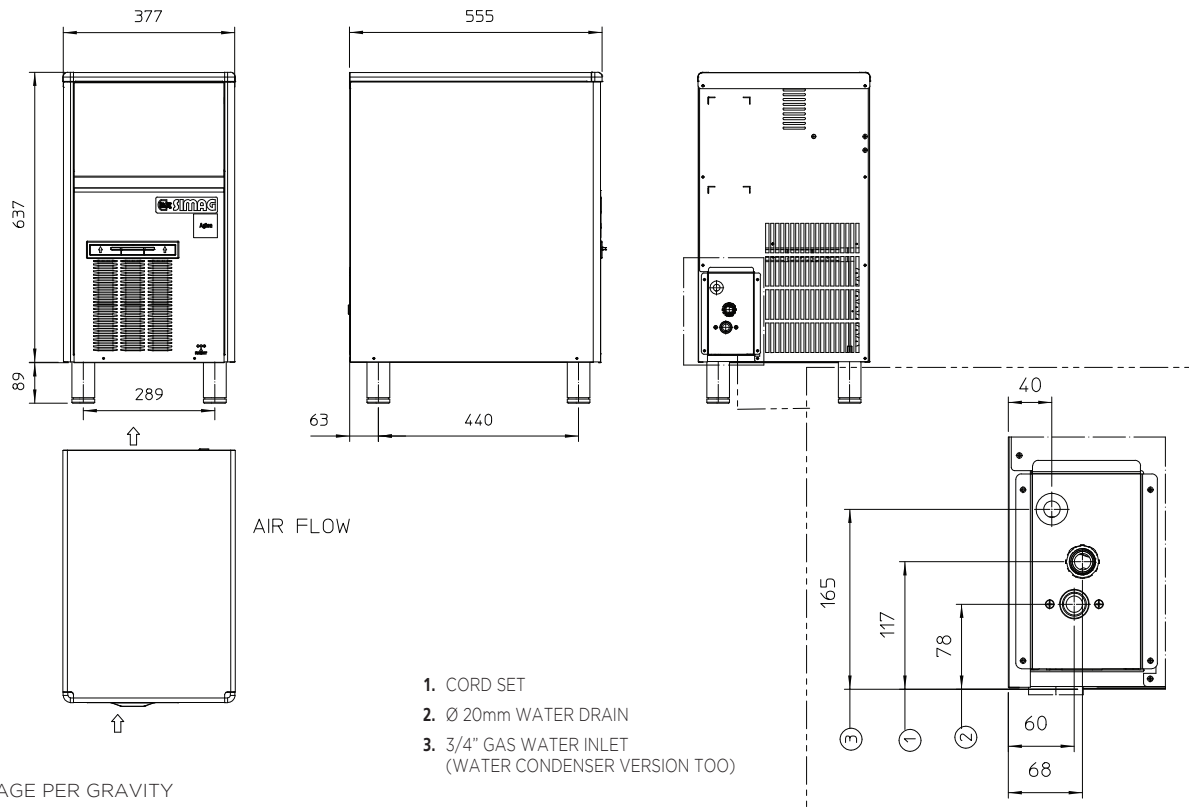

Operating Limits

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject to change without notice

Model	Voltage	Daily production kg 10°C/10°C	Power input Watt (*)	Refrigerant		Fuse A	Consumptions (**)		
				Type	Charge kg		kWh/ 100kg	kWh/ 24h	Water l/h
SDE 40 A	230/50/1	38	350	R134a	0.260	10	26.1	7	3.8
SDE 40 W	230/50/1	36	350	R134a	0.240	10	n.a.	n.a.	22.0
SDE 40 A	220/60/1	38	350	R134a	0.260	10	n.a.	n.a.	3.8
SDE 40 W	220/60/1	36	350	R134a	0.240	10	n.a.	n.a.	22.0

(*) Power Input: at 43°C Ambient Temperature

(**) Water Consumption: at 32°C Air and 21°C Water